

Настройка роутера Dlink


Соедините кабелем компьютер и роутер. Откройте ваш Интернет браузер (Internet Explorer, Mozilla Firefox , Opera, Google Chrome) и введите в адресной строке **192.168.0.1**

В появившемся окне введите:

Имя пользователя – **admin**

Пароль – **пустое поле**

Нажмите «Log In».

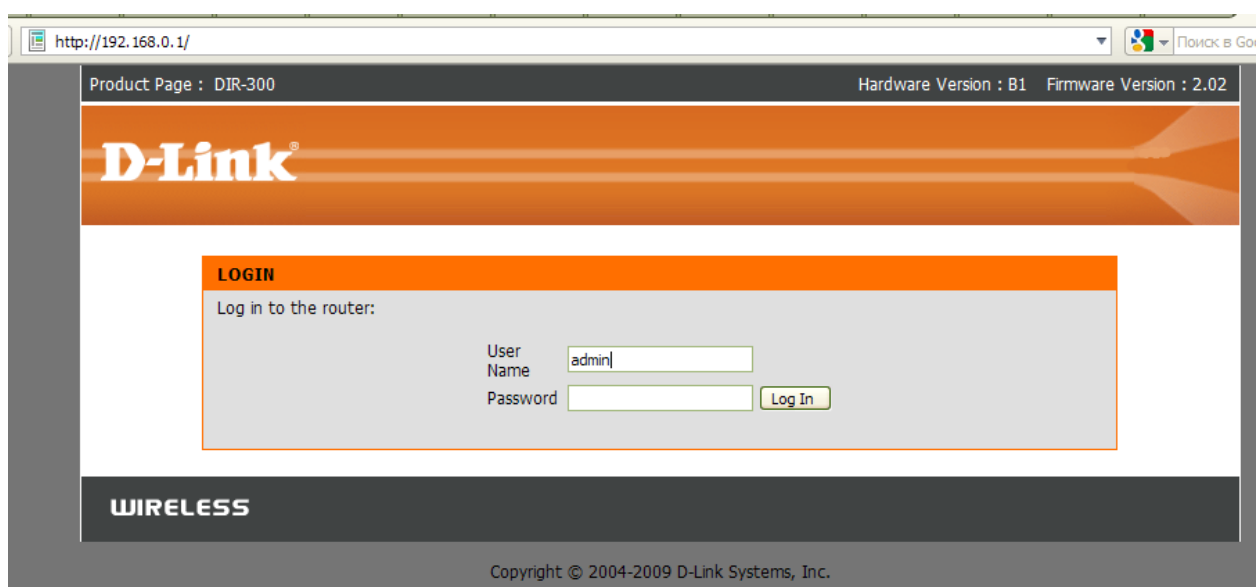

На вкладке **Setup**, выбираете вкладку **Internet Setup**
Нажимаете кнопку **Manual Internet Connection Setup**

D-Link

DIR-300 // SETUP ADVANCED MAINTENANCE STATUS HELP

Internet Setup
Wireless Setup
LAN Setup
Time and Date
Parental Control
Logout

Internet Offline
Reboot

INTERNET CONNECTION

If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard, and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup.

INTERNET CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Internet Connection Setup Wizard

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL INTERNET CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Manual Internet Connection Setup

Helpful Hints..

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.

- Выбираете подключение с **Dynamic PPPoE**,
- Вводите логин в **Username**, пароль в **Password** и **Retype Password** (указаны в договоре)
- при необходимости можно изменить MAC-адрес,
- **Connect mode select** - «**Always-on**».

Затем нажимаете кнопку «**Save Setting**»

Internet Setup

Wireless Setup

LAN Setup

Time and Date

Parental Control

Logout

Internet Offline

Reboot

INTERNET CONNECTION

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

ACCESS POINT MODE

Use this to disable NAT on the router and turn it into an Access Point.

Enable Access Point Mode

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : Russia PPPoE (Dual Access) ▼

RUSSIA PPPOE (DUAL ACCESS)

Enter the information provided by your Internet Service Provider (ISP).

Dynamic PPPoE
 Static PPPoE

User Name :
 Password :
 Retype Password :

 Service Name : (optional)
 IP Address :

MAC Address : - - - - - (optional)

Receive DNS from ISP
 Enter DNS Manually

 Primary DNS Address :
 Secondary DNS Address : (optional)
 Maximum Idle Time : Minutes
 MTU :
 Connect mode select : Always ▼
 Manual Connect-on demand

Helpful Hints..

- **Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct Internet Connection Type from the drop down menu. If you are unsure of which option to choose, please contact your Internet Service Provider (ISP).
- **Support:** If you are having trouble accessing the internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

Настройка Wi-Fi

Открываем вкладку «**Wireless Setup**».

Включаем Wi-Fi (**Enable Wireless**) нужно поставить галочку,

Wireless Network Name: Задаём название сети,

Security mode: Задаём тип защиты **WPA/WPA2**,

Указываем пароль в пункте **Network Key** (не менее **8** символов),

Нажимаем кнопку **Save Settings**.

DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup	WIRELESS NETWORK				Helpful Hints... <ul style="list-style-type: none"> • Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature. • Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information. • Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device. • If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.
Wireless Setup	<p>Use this section if changes made in пункт настройки wi-fi Link router. Please note that on your wireless client.</p> <p>To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.</p> <p>Save Settings Don't Save Settings</p>				
LAN Setup	WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA) <p>Enable: <input checked="" type="checkbox"/></p> <p>Current PIN: <input type="text"/></p> <p>Generate New PIN Reset PIN to Default</p> <p>Wi-Fi Protected Status: Enabled / Configured</p> <p>Reset to Unconfigured</p> <p>Add Wireless Device with WPS</p>				
Time and Date	WIRELESS NETWORK SETTINGS <p>Enable Wireless: <input checked="" type="checkbox"/> Always <input type="button" value="New Schedule"/></p> <p>Wireless Network Name: <input type="text"/> (Also called the SSID)</p> <p>Enable Auto Channel Selection: <input checked="" type="checkbox"/></p> <p>Wireless Channel: <input type="text"/></p> <p>Transmission Rate: Best (automatic) (Mbit/s)</p> <p>WMM Enable: <input checked="" type="checkbox"/> (Wireless QoS)</p> <p>Hidden Wireless: <input type="checkbox"/> (Also called the SSID Broadcast)</p>				
Parental Control	WIRELESS SECURITY MODE <p>Security Mode: Enable WPA/WPA2 Wireless Security (enhanced)</p>				
Logout	WPA/WPA2 <p>WPA/WPA2 requires stations to use high grade encryption and authentication.</p> <p>Cipher Type: AUTO(TKIP/AES)</p> <p>PSK / EAP: PSK</p> <p>Network Key: <input type="text"/></p> <p>(8-63 ASCII or 64 HEX)</p>				

включаем wi-fi

ИМЯ СЕТИ

задаем тип защиты сети

задаем пароль сети